



Invisible

Single sliding door system

Astonishing. Cool. Chic. Invisible is all of this and more. It's stunningly concealed low profile mechanism and track make it an enigma at first sight.

With inbuilt soft close and full adjustability Invisible is a true revolution in sliding doors.

Maximum door panel weight of 80kg.

Top hung


Integrated soft close

Full technical support


Complete adjustment

Hides all sliding mechanisms


Invisible Components




Adjustable upper roller




Lower guide



A) Soft closing stopper R-L (80kg)
B) Soft closing stopper R-L (40kg)



End cover




Pins



Upper profile



Lower profile



Lower runner



Fixing screws

Fitting kit includes: 1 x 1.15 metre steel track, 1 x four wheel nylon wall roller, 2 x soft close, 1 x nylon floor guide, 1 x aluminium bottom guide profile, 2 x bottom castors, 2 x end caps, fixing screws and wall plugs

Description	Code
40kg Invisible door system	1040X
80kg Invisible door system	1080X





Scan to view the video



Specification


- Maximum door weight: 0 - 40kg, 40 - 80kg
- Minimum door thickness: 40mm
- Max door width: 1150mm (Track length)
- Door width = Door opening width + 253mm
- Door height = Door opening height + 100mm
- Max door opening width: 900mm

Directional openings




Fitting positions

Wall fitting positioning
without skirting


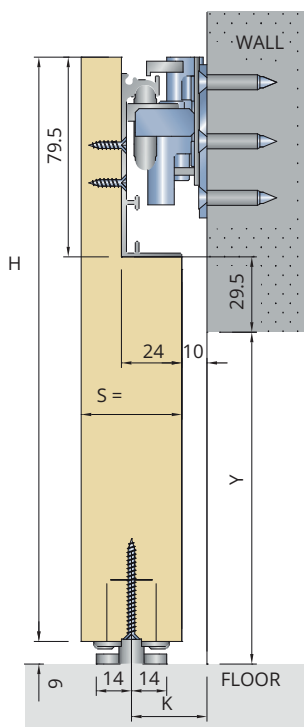


H =	Y + 100
-----	---------

Wall fitting positioning
with skirting

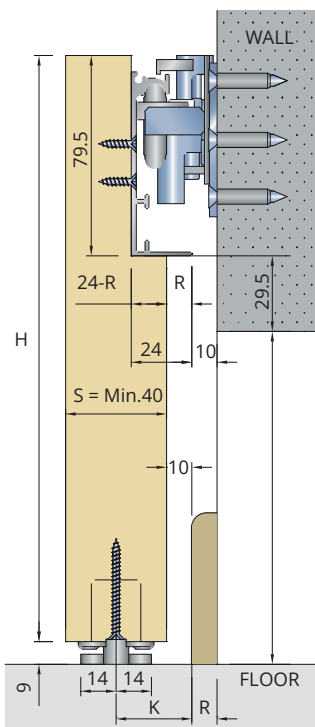

R =	Skirting board thickness
-----	--------------------------

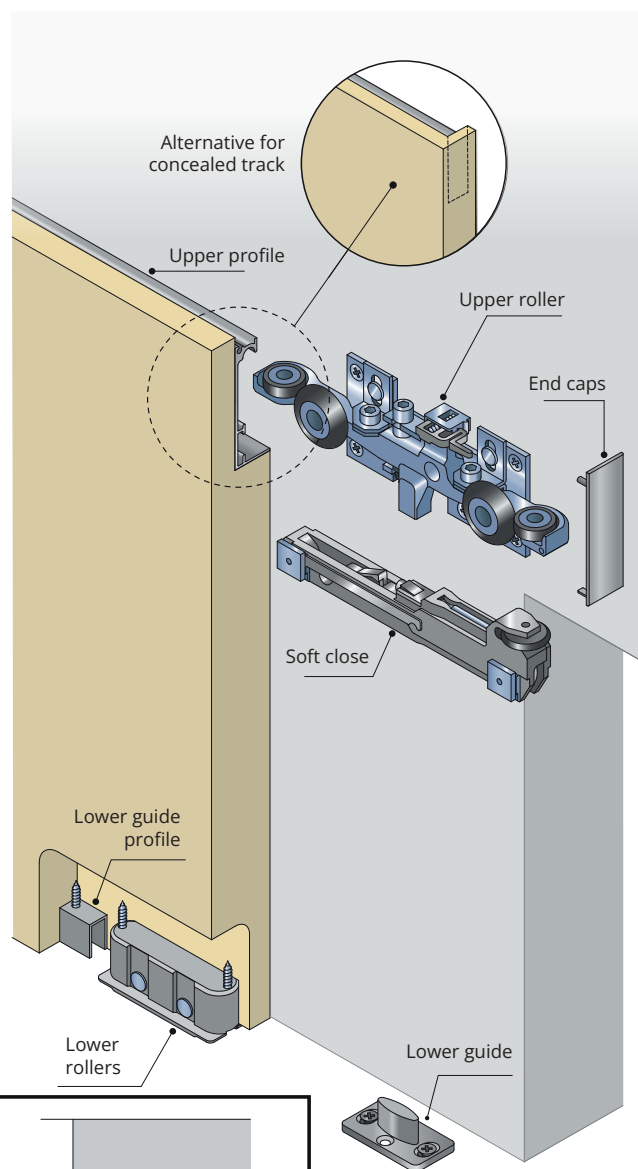

D = 83mm	For doors with end caps
D = 91.5mm	For doors with concealed track