


Tommaslide Glass

Glass Panel Straight Sliding System




Tommaslide Glass is suitable for 8mm, 10mm and 12mm glass thickness. Featuring a smooth rolling system that is suitable for a frameless glass panels.


The Tommaslide can be Soffit fixed to your door frame or Face fixed to the side of your wall. All Tommaslide rollers are tested to 100,000 cycles and come with a 10 year warranty.




Maximum Door Panel Weight of 100kg.




Featuring High Quality Components




Smooth gliding action when operating



Supports 8mm, 10mm and 12mm Glass Thickness




Tested to 100,000 Cycles



Suitable for Frameless Glass Panels

Tommaslide Glass Door Components



2x Roller Brackets



1x Bottom Guide



2x Four Wheel Hangers

2x Bolts and nuts

2x Track Stops


Softclose Optional Extra

Description	Code
0-20kg Doors	TS100SC0-20
20-40kg Doors	TS100SC20-40
40-60kg Doors	TS100SC40-60
60-80kg Doors	TS100SC60-80



Top Track Satin Aluminium




Length	Code
2 Metre	60-TT2000-SAA
3 Metre	60-TT3000-SAA
4 Metre	60-TT4000-SAA
6 Metre	60-TT6000-SAA




Tommaslide Glass Bracket

Specification

- Suited to Frameless Glass Panels
- Maximum Door Weight with Softclose: 80kg
- Glass Panel Thickness: Suitable for 8mm, 10mm and 12mm thick glass
- Minimum Panel Width with Soft Close: 400mm wide

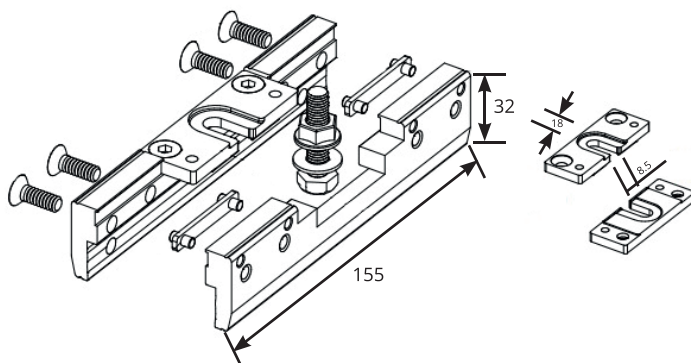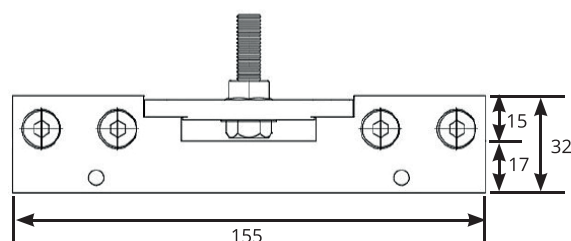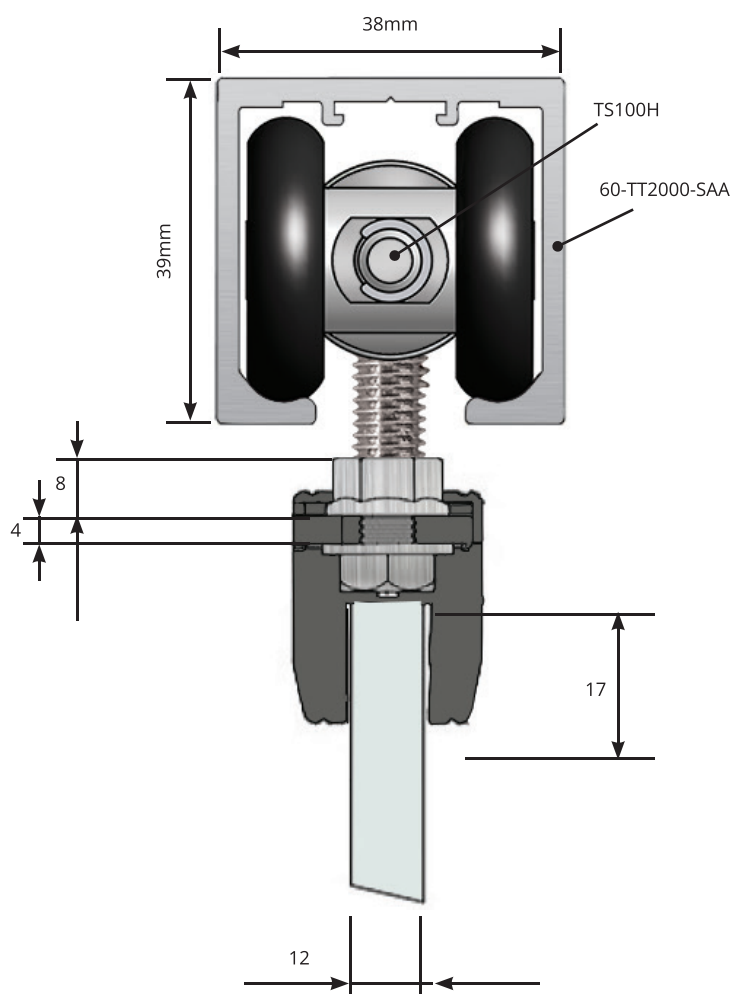

Soffit Fixing

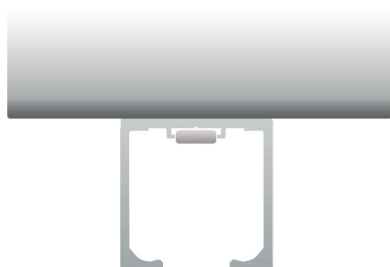

Face Fixing

