


Durafold

Installation Manual

i


- Nickel-plated mechanisms and plastic cover
- Stable movement thanks to two-axis guidance
- 50 kg carrying capacity (25kg per door)
- Compatible wide range of hinge options
- Compatible with 16-25 mm cover thickness
- Using with 2 or 2+2 doors
- Right and left door option
- Wide usage area with maximum 110 degree opening
- Ease of use with the same door dimensions
- Easy assembly and disassembly

i

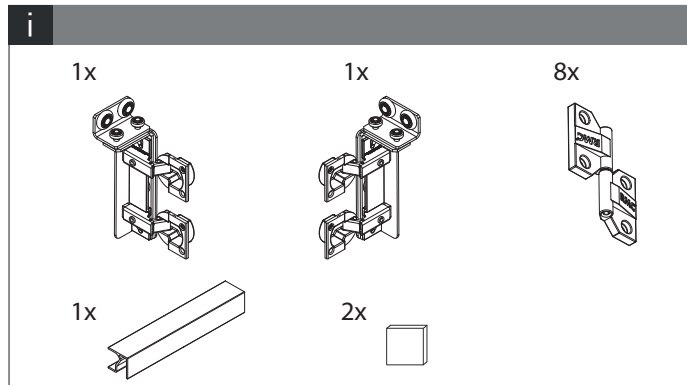


1x 1x 8x 1x 2x

i

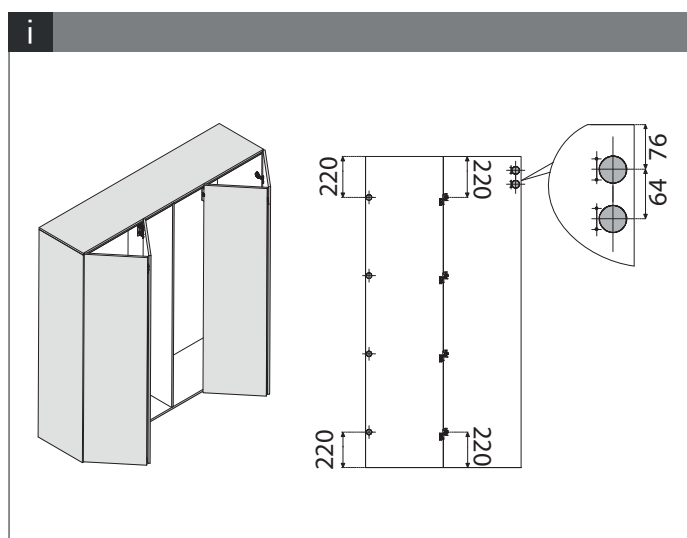


220 220 220 220 64 76

i

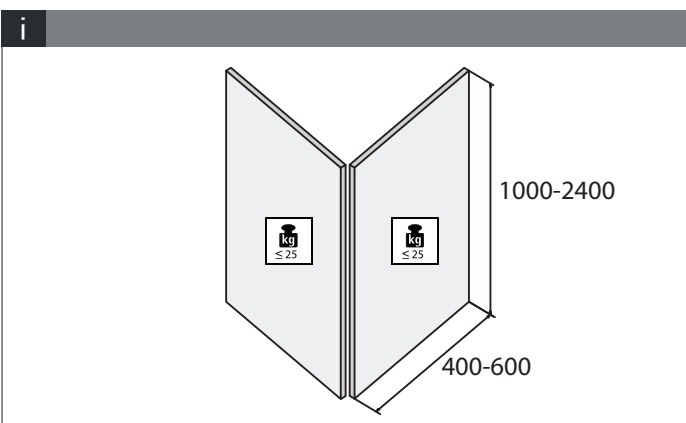


1000-2400 400-600 ≤ 25 kg ≤ 25 kg

i

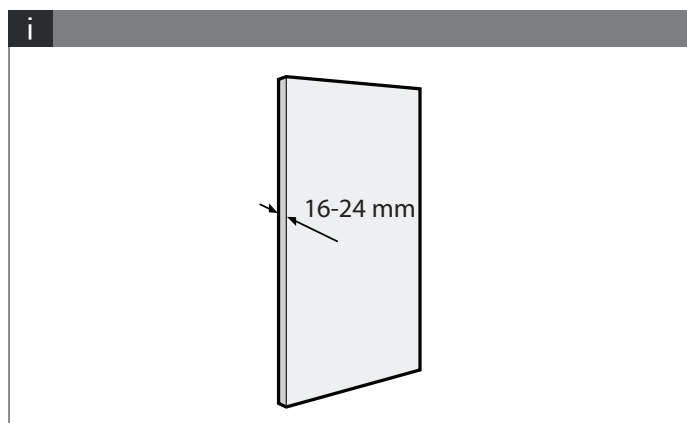


16-24 mm

i

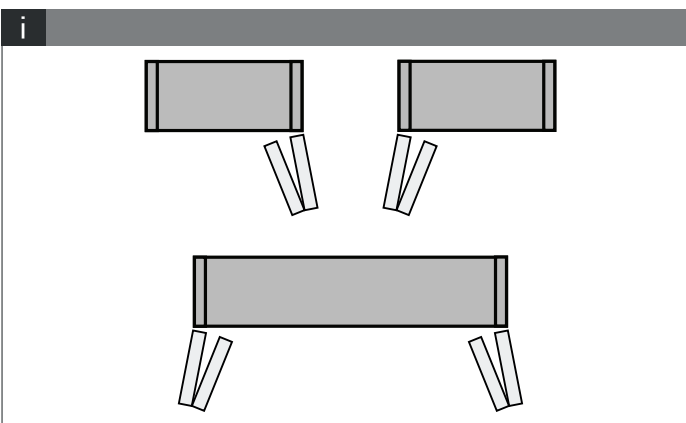








50 60

i

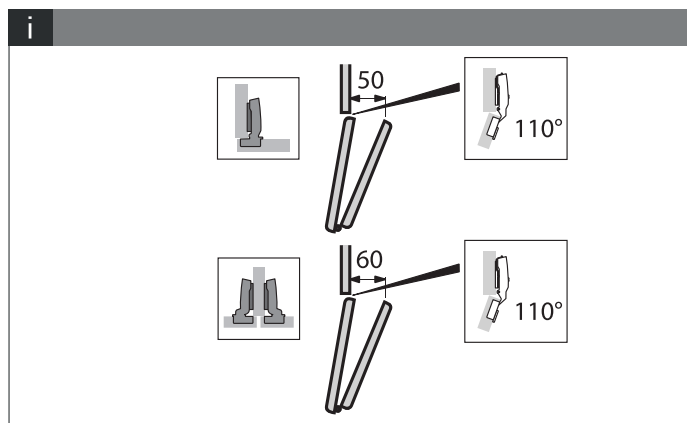

110° 110°

Durafold Installation Manual

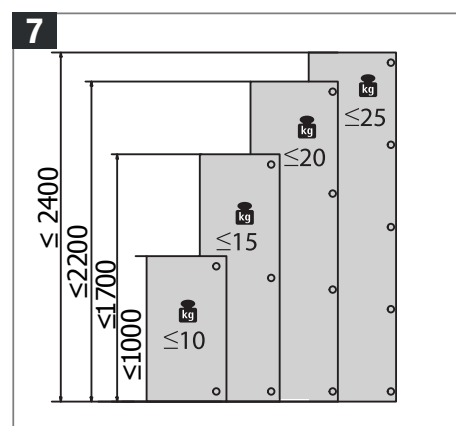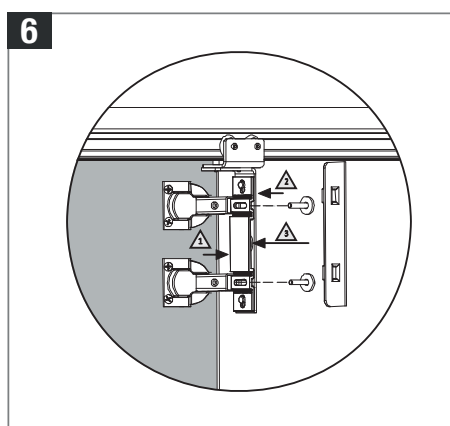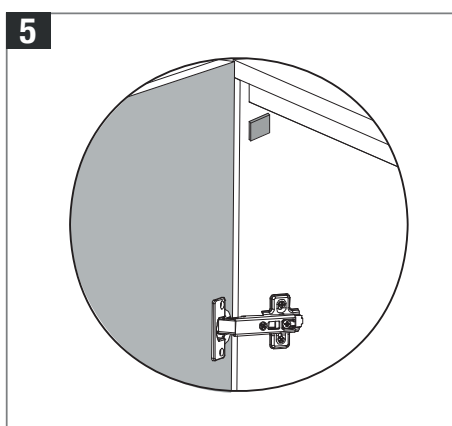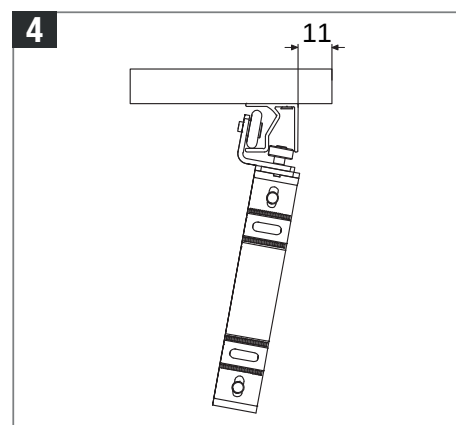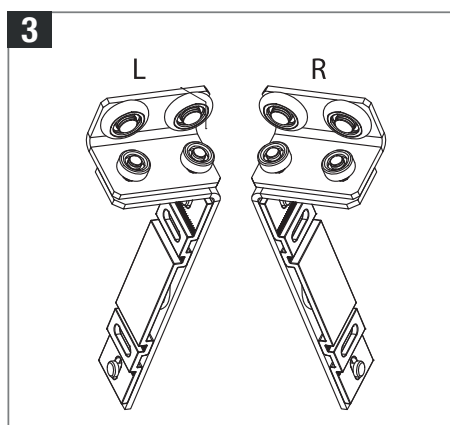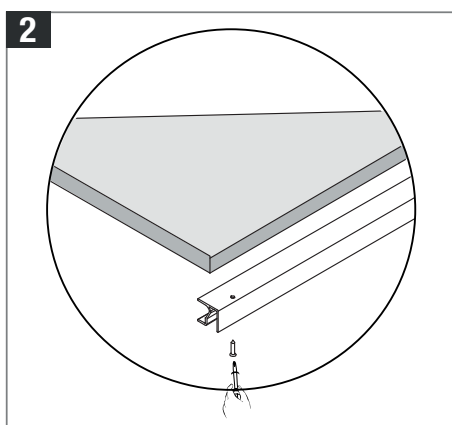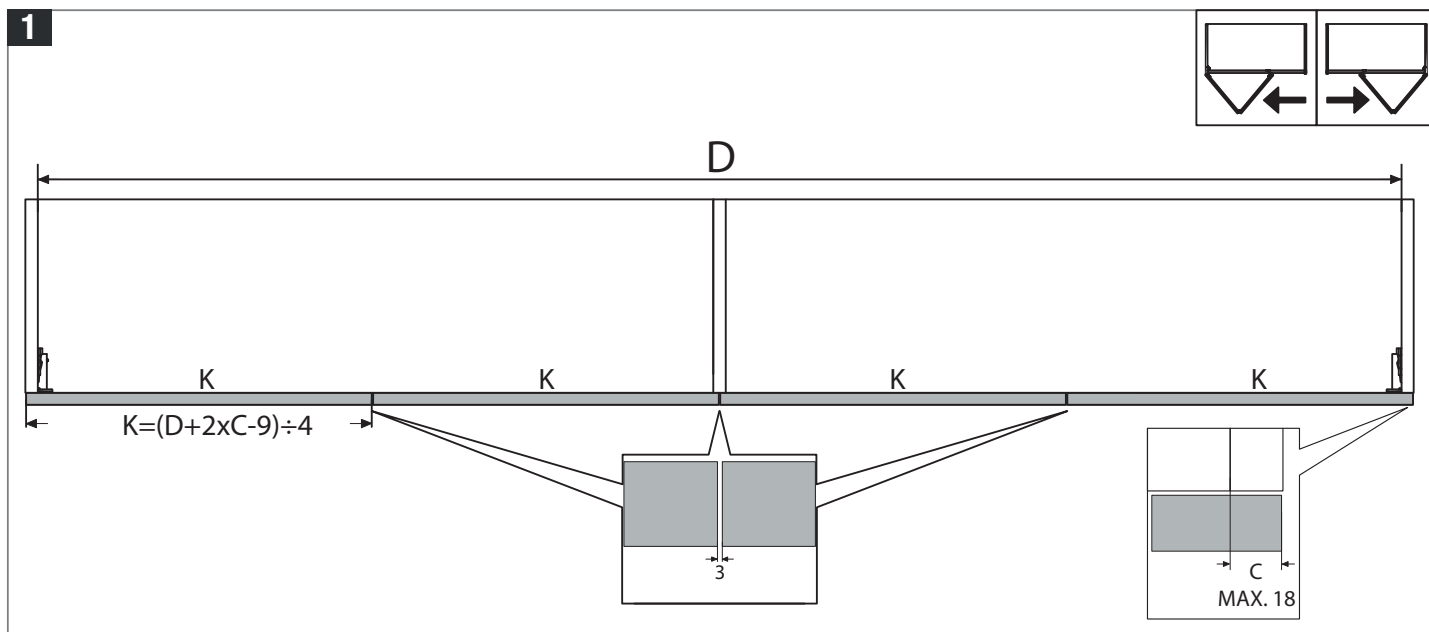

Please note the weights above relate to the amount of hinges connecting the first door to the carcass.