



DuraFold

Folding cabinet/Wardrobe door system

Suitable for doors up to 25kg (50kg for two panels).

Top hung

Full technical support

Inframe and overlay doors

Can be used with 2 or 2+2 doors

110 Degree opening - usage area


The DuraFold is a high quality bi-folding system, which is suitable for cabinet and wardrobe doors.

The DuraFold is a top rail solution with no bottom guide. Refined bearings make it a suitable option for larger door applications.


Components




Top rollers

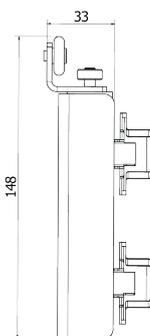

Hinges



Top track profile
1200 mm and 2400 mm






4 Door fitting kit (2 x doors LH and 2 x doors right) includes: 8 x hinges, 1 x LH roller and 1 x RH roller
*No hinges included to connect first door to cabinet

Description	Finish	Code
DuraFold Bifold Kit, 2 Left & 2 Right, 1200 mm Track		DF1200
DuraFold Bifold Kit, 2 Left & 2 Right, 2400 mm Track		DF2400
Blum hinge soft close cliptop blumotion 110° full overlay (16-26 mm door thickness)	Chrome	CFE440
Blum hinge soft close cliptop blumotion 110° inset (16-26 mm door thickness)	Chrome	CFE442
Blum hinge soft close cliptop blumotion 110° full overlay (16-26 mm door thickness)	Onyx Black	71B3550.OB
Blum hinge soft close cliptop blumotion 110° inset (16-26 mm door thickness)	Onyx Black	71B3550.OB
Blum hinge clip mounting plate cruciform - 1-part adjustable c/w pre-mount screws & expando dowels 0 mm	Chrome	CFE407
Blum hinge clip mounting plate cruciform - 1-part adjustable c/w pre-mount screws & expando dowels 0 mm	Onyx Black	141935



Specification

- **Maximum panel weight:** 25kg
(50kg per 2 x panels)
- **Door thickness:** 16 mm - 25 mm
- **Suitable panel widths:** Up to 600 mm
- **For inset and overlay applications**
- **Maximum of 2 doors folding each side**
- **Panel size:** 400 - 600 mm

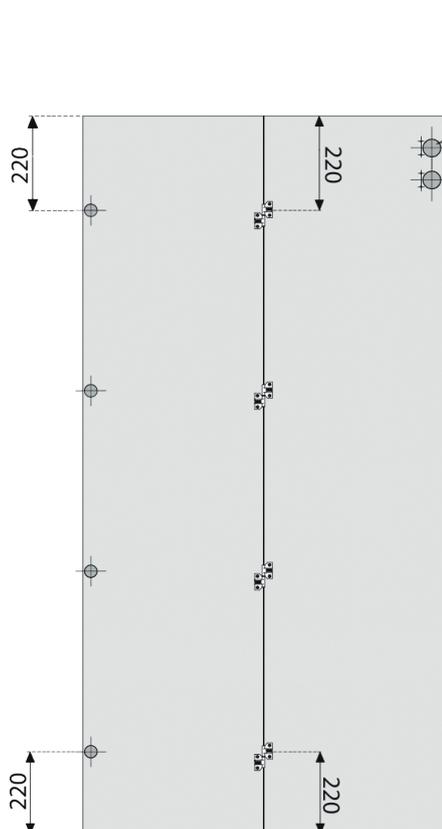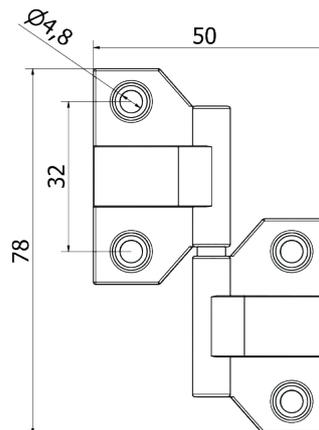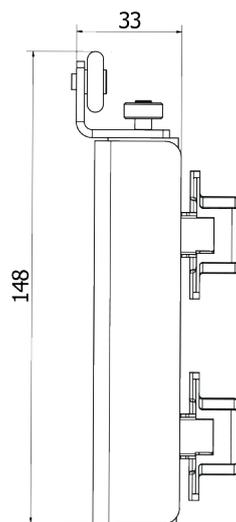

Suitable for 35 mm cup concealed hinges for hanging to cabinet.

