



FurnFold

Folding cabinet/Wardrobe door system

Suitable for doors up to 15kg (30kg for two panels).

Top hung

Full technical support

Inframe and overlay doors

Easy to fit and adjustable

Door thickness: 16-30 mm

Furnfold bi-folding door track system for cabinet/wardrobe doors remains one of the most popular sellers in our range.

The Furnfold is the ideal lightweight bi-folding option for cabinet or wardrobe doors.

Components



Fitting kit for 2 x doors left or 2 x doors right includes: 1 x top hinge roller and 3 x hinges
 Fitting kit for 4 doors 2 x doors left + 2 x doors right includes: 2 x top hinge roller and 6 x hinges


*No hinges included to connect first door to cabinet

Description		Code	
1200 mm Track	1200 mm top track, fitting kit for 2 doors (left or right) with lower track to suit	FF1200BT-2	
	1200 mm top track, fitting kit for 4 doors (2 left 2 Right) with lower track to suit	FF1200BT-4	
	1200 mm top track and fitting kit for 2 doors (left or right)	FF1200-2	
	1200 mm top track, fitting kit for 4 doors (2 left 2 Right)	FF1200-4	
2400 mm Track	2400 mm top track, fitting kit for 2 doors (left or right) with lower track to suit	FF2400BT-2	
	2400 mm top track, fitting kit for 4 doors (2 left 2 Right) with lower track to suit	FF2400BT-4	
	2400 mm top track and fitting kit for 2 doors (left or right)	FF2400-2	
	2400 mm top track, fitting kit for 4 doors (2 left 2 Right)	FF2400-4	
		Finish	
		Code	
Blum hinge soft close cliptop blumotion 110° full overlay (16-26mm door thickness)		Chrome	CFE440
Blum hinge soft close cliptop blumotion 110° inset (16-26mm door thickness)		Chrome	CFE442
Blum hinge soft close cliptop blumotion 110° full overlay (16-26mm door thickness)		Onyx Black	71B3550.OB
Blum hinge soft close cliptop blumotion 110° inset (16-26mm door thickness)		Onyx Black	71B3550.OB
Blum hinge clip mounting plate cruciform - 1-part adjustable c/w pre-mount screws & expando dowels 0mm		Chrome	CFE407
Blum hinge clip mounting plate cruciform - 1-part adjustable c/w pre-mount screws & expando dowels 0mm		Onyx Black	141935




Specification

- **Door thickness:** 16 mm - 30 mm
- **Suitable panel widths:** Up to 500 mm
- **For inset and overlay applications**
- **Maximum of 2 doors folding each side**
- **Suitable for doors up to 15kg (30kg for two panels)**

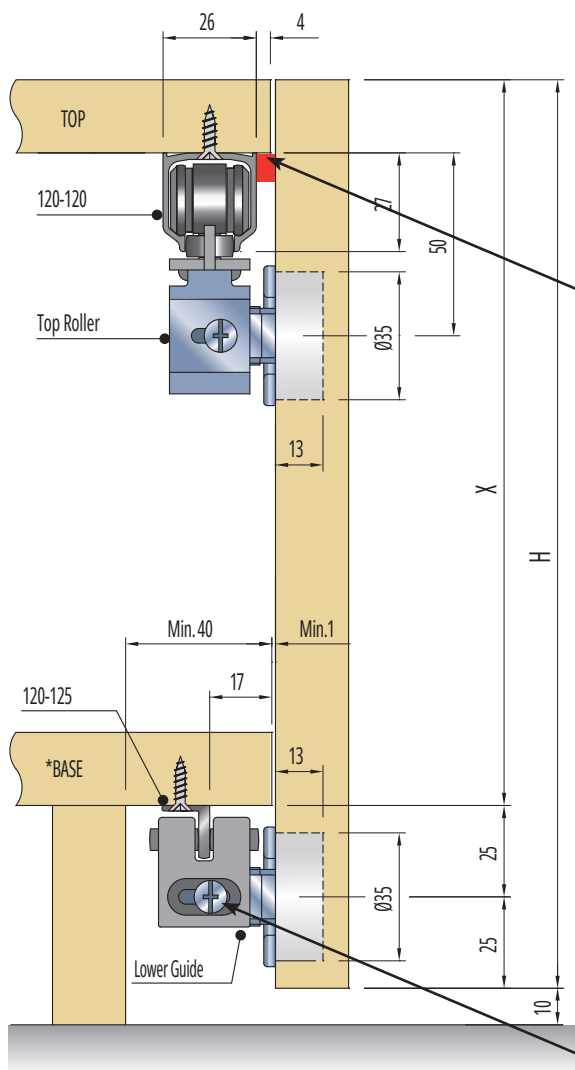

Stop needed for centre hinge point to close on (insert application only)

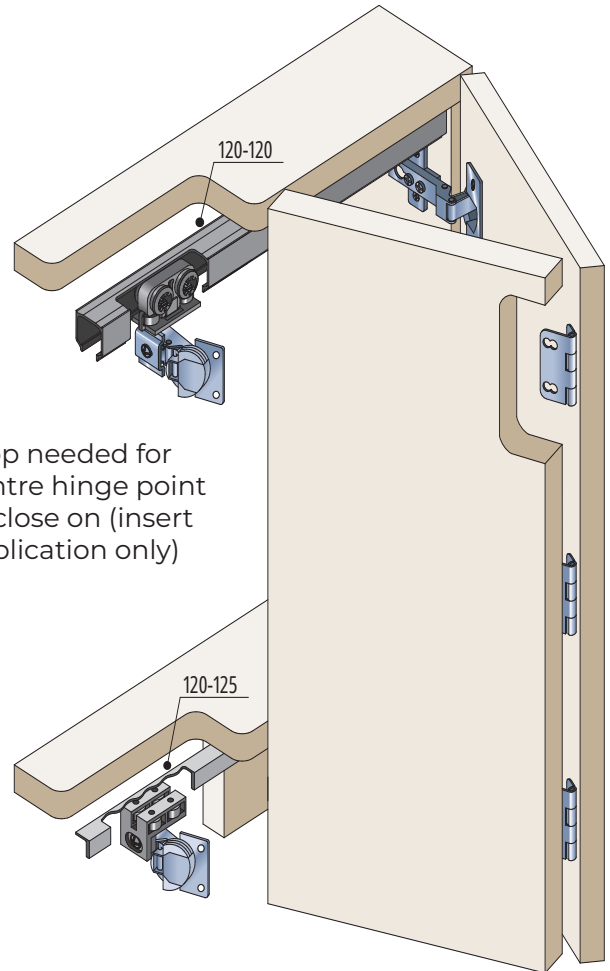

Alternative bottom guide set up

