



HiddenSlide 60 brings clean, modern design with its fully concealed running gear.



Built for wooden doors 32 to 45 mm thick, up to 1200 mm wide and 60 kg, it delivers a smooth, effortless glide.

Soft close adds quiet, controlled movement, giving everyday use a refined feel.

By replacing bulky swing doors, it frees up space and fits perfectly in compact or minimalist interiors.

HiddenSlide 60

Single sliding door system

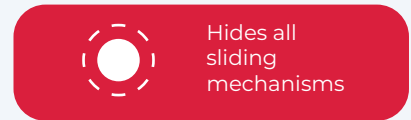

- **Door thickness:** 32 - 45 mm
- **Maximum door width:** 1200 mm
- **Track length:** 1200 mm
- **Door height:** 2700 mm below
- **Maximum opening width:** 1100 mm

Components




Upper profile



Lower profile



Soft closing/open stoppers



Adjustable upper roller




Lower runner



Lower guide




Fixing screws

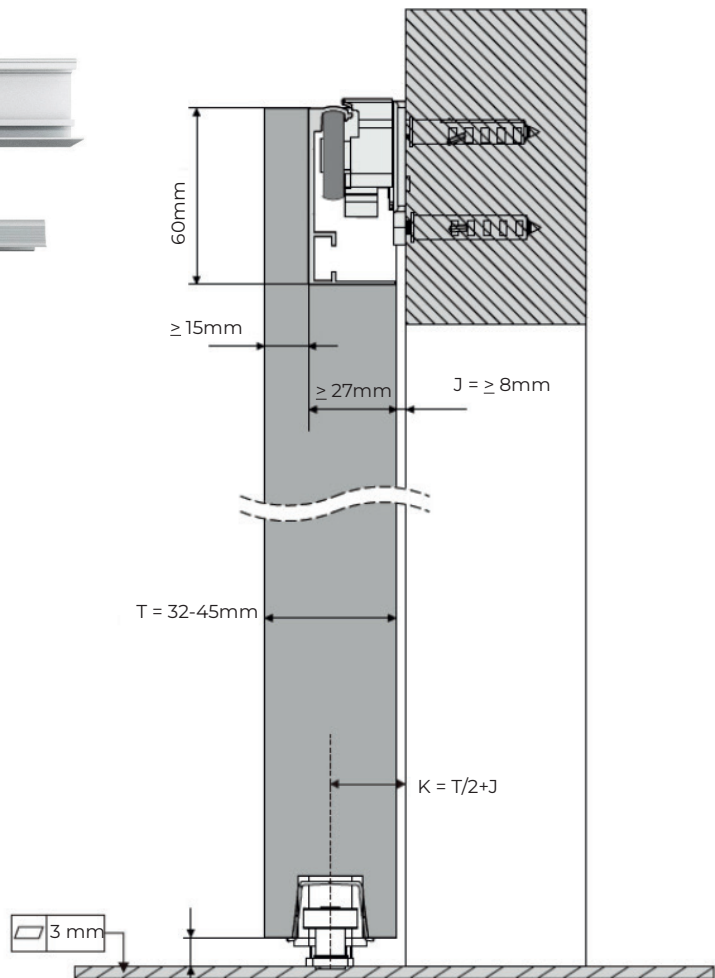

Fitting kit includes: 1 x upper profile, 1 x lower profile, 1 x soft close, 1 x soft open, 1 x nylon floor guide, 2 x lower runner, fixing screws and wall plugs

Hanging Guide

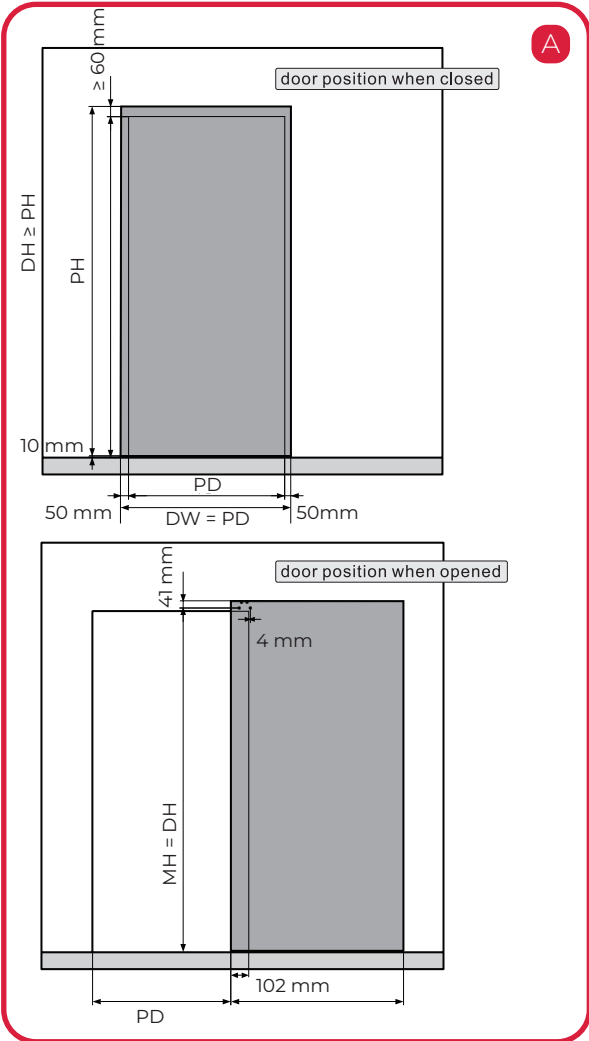

Key	
DW	Door width
PD	Passage width
DH	Door height
PH	Passage height
MH	Hanger position

Preparation A

$DW = PD + 50 \text{ mm} + 50 \text{ mm}$ passage width
$DH \geq PH - 10 \text{ mm} + 60 \text{ mm}$
$MH = DH + 10 \text{ mm} - 41 \text{ mm}$
$PD - 102 \text{ mm}$

Preparation B

$DW = PD + 50 \text{ mm} + 92 \text{ mm}$
$DH \geq PH - 10 \text{ mm} + 60 \text{ mm}$
$MH = DH + 10 \text{ mm} - 41 \text{ mm}$
$PD - 60 \text{ mm}$

Preparation C

$DW = PD + 50 \text{ mm} + 152 \text{ mm}$
$PW \geq PH - 10 \text{ mm} + 60 \text{ mm}$
$MH = DH + 10 \text{ mm} - 41 \text{ mm}$

