



ProSlide 18 is a complete sliding door system including tracks, fittings and aluminium profiles designed for 18mm centre panels.

This system is bottom rolling and guided at the top, which is perfect where large lightweight doors are required.

The ProSlide 18 is a double track, bypassing system enabling multiple doors to slide past each other.

The Runners Lifetime Guarantee covers the ProSlide 18 for 2years from purchase date, this covers normal use of the products in a domestic environment, for commercial environments our standard 12-month guarantee would apply. Please contact our customer service team for more information.

ProSlide 18

Wardrobe sliding system



Maximum door panel weight of 50kg.



Bottom Rolling



Full technical support



Hassle free door solution



Adjustable sliding solution



Suitable for inset doors



Frame sliding system



Soft-close




Runners Lifetime warranty*



Easy to fit and suitable for interior applications



ProSlide 18 Components

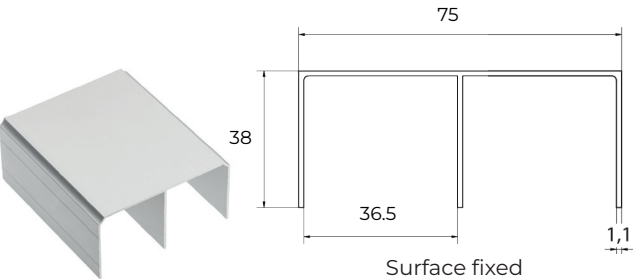



(A) 3000 mm top track
Code: 500-101-3



(B) 3000 mm bottom track
Code: 500-109-3




(C) 3000 mm Bottom track masking frame cover cap
Code: 500-110-3

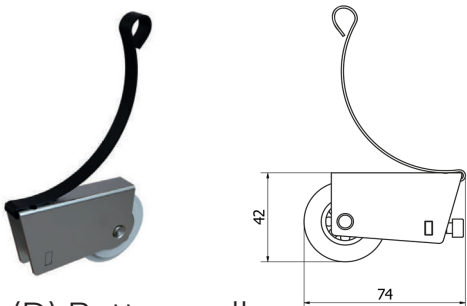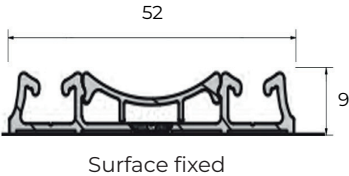


(D) Bottom roller
Code: 500-202




(E) Top roller
Code: 500-201




(F) 3000 mm Top frame/roller housing profile
Code: 500-321

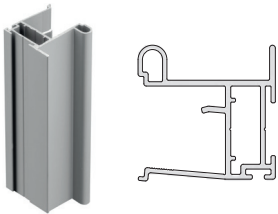


(G) 2700 mm side handle housing profile
Code: 500-418

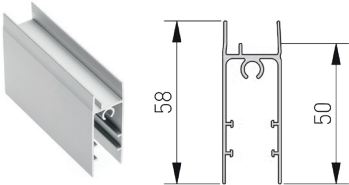

(H) 3000 mm bottom frame/roller housing
Code: 500-320

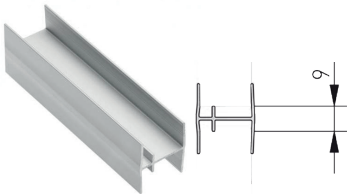


(I) 3000 mm middle panel connector
Code: 500-419

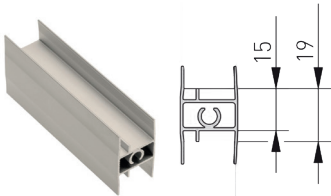

(J) 3000 mm bolt-on middle panel connector
Code: 500-319



(M) Fitting bolts
Code: 500-203

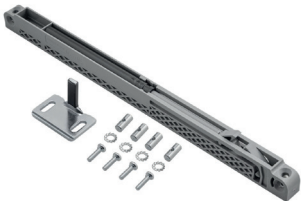

(N) Soft-open & close
Code: 500-204





Drilling tool
Code: 500-208



Two-step drill bit
Code: 500-207


ProSlide 18 Specifications

Components guide

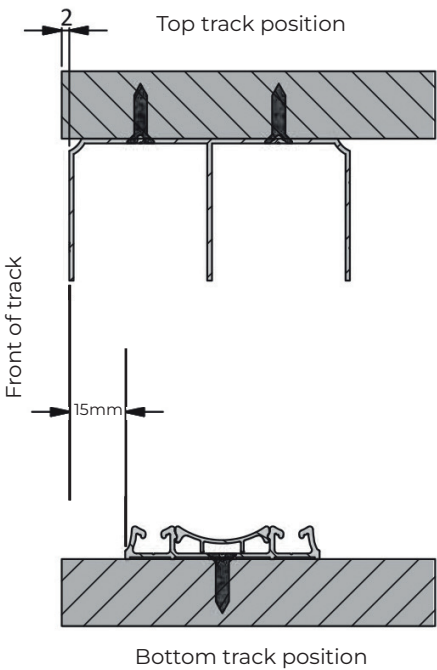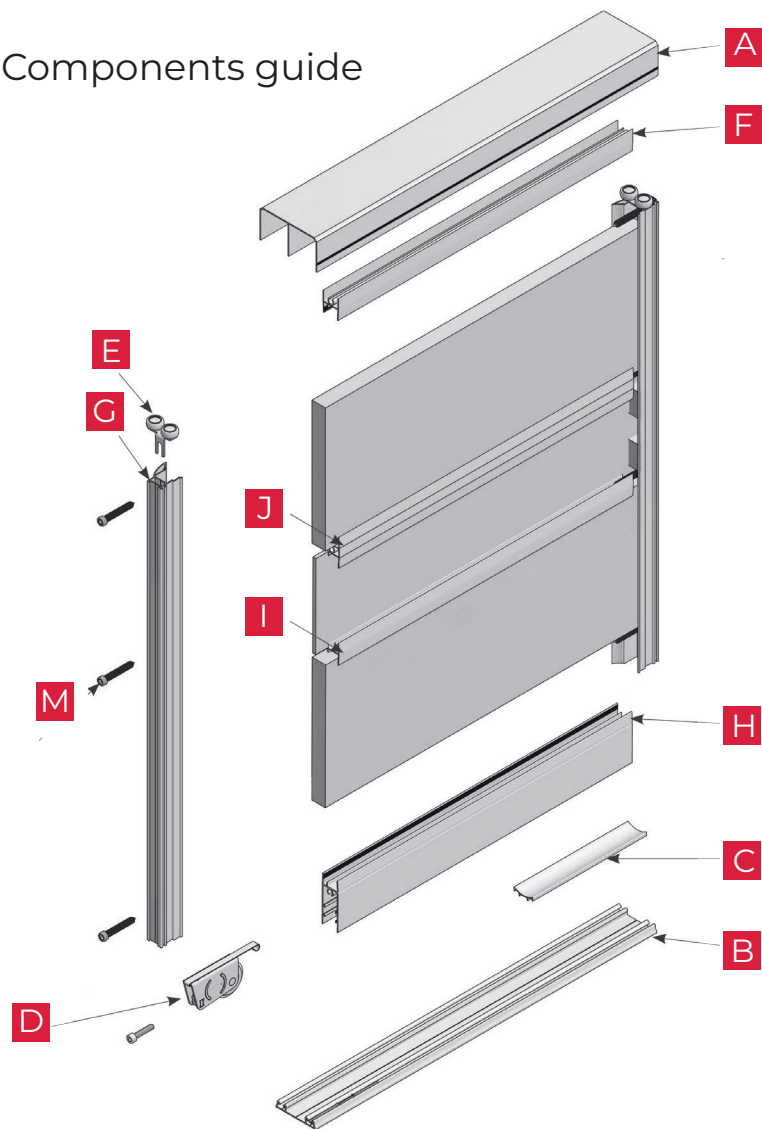


Soft-open and closer for left + right doors

Code: 500-204

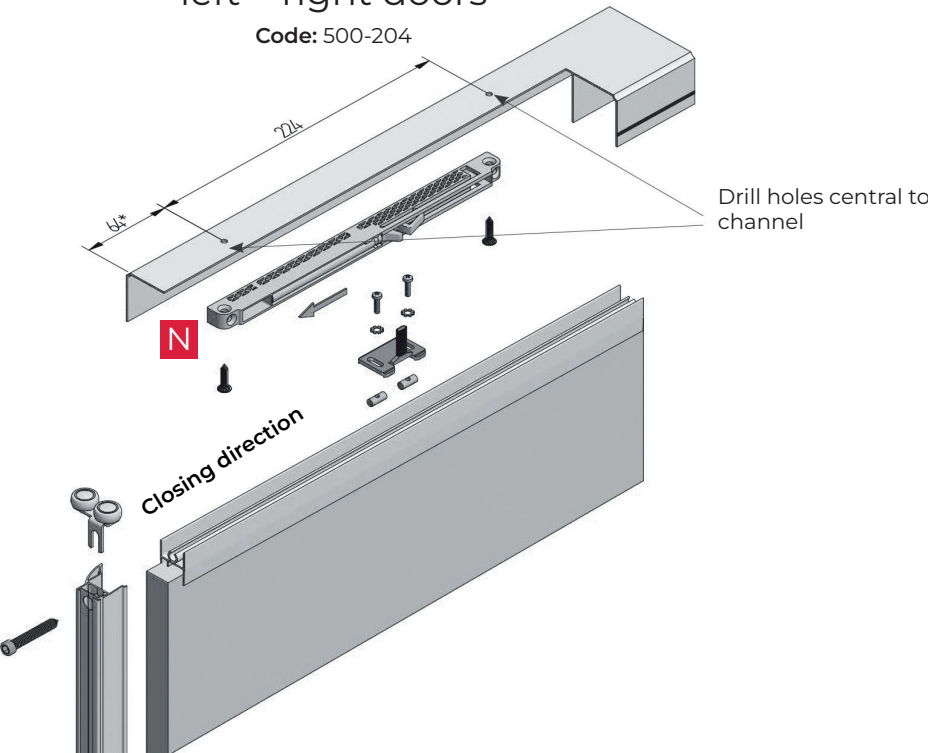


ProSlide 18 Configurations

Door configurations

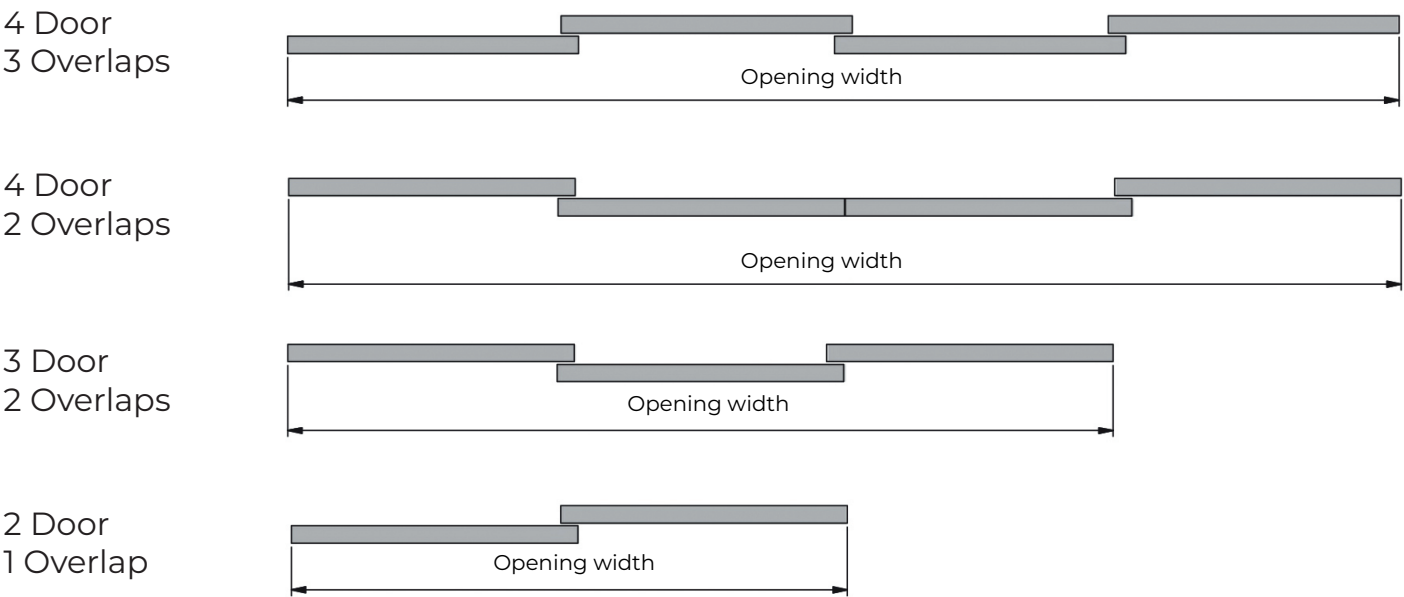

Calculations

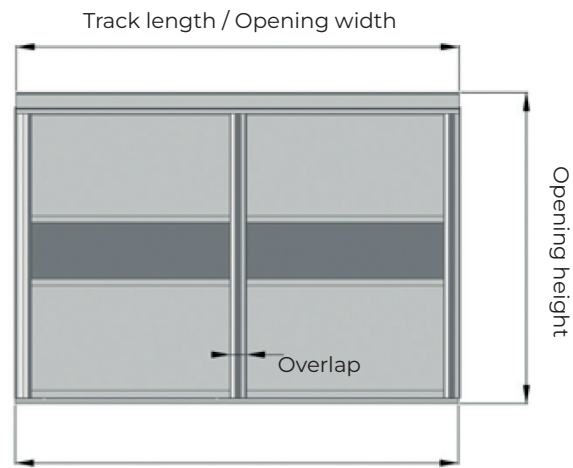

Track length = Opening width
Door height = Opening height - 50mm
Overlap width = 30mm

Profile size calculations	Infill panel dimensions
Top door profile = Door width - 55 mm	Panel size = door width - 31 mm x door height - 69 mm
Horizontal centre rail = Door width - 55 mm	Where 2 or more infill panels are being used reduce height by 1 mm - 2 mm for every horizontal middle panel connector rail used.
Lower door profile = Door width - 55 mm	When using the horizontal bolt-on middle panel connector rail the dimensions of the connector rail must be taken into account.
Handle height = Door height	

Wardrobe sliding door system

The track and mechanisms are hidden behind overlay doors. With its high weight capacity of 60kg per panel and soft-close option the TopSlide is a modern, sleek sliding solution. TopSlide is a double track, bypassing system enabling multiple doors to slide behind each other.



- **Maximum door panel weight:** 60kg
- **Minimum door thickness:** 16 mm
- **Maximum door thickness:** 22 mm

Top
roller (A)



Top
roller (B)



Top
roller (C)



Lower
guide (A)






Lower
guide (B)




Soft-close
units

	Description	Code
2 Door fitting kit	3000 mm track	TS3000-2
	6000 mm track	TS6000-2
3 Door fitting kit	3000 mm track	TS3000-3
	6000 mm track	TS6000-3
4 Door fitting kit	3000 mm track	TS3000-4
	6000 mm track	TS6000-4

Fitting kit for two door includes: 2 x top roller (A), 1 x top roller (B), 1 x top roller (C),
2 x lower guide (A), 2 x lower guide (B) and 2 x soft-close

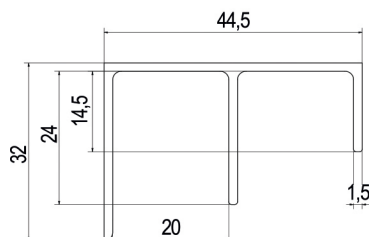

Top
roller



Bottom
roller



Contact for further information
01280 822288 | www.runners-uk.co.uk | sales@runners-sales.com



Scan to view
the video

